



- Enhanced sensing range
- Short-circuit protection (pulsed)
- Robust brass housing, nickel-plated with fine thread M30 x 1.5 mm
- Enclosure rating IP 67
- Installation quasi-flush

Dimensional drawing



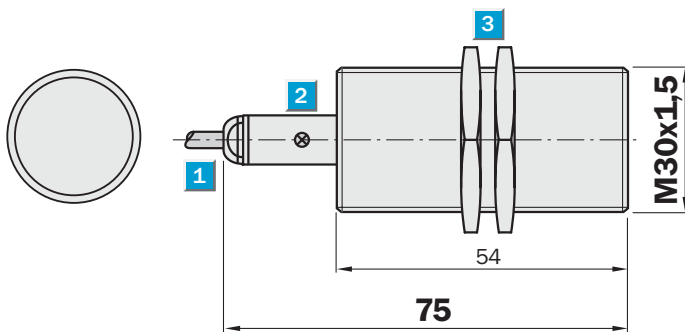


- 1 Connection
- 2 Display LED
- 3 Fastening nuts (2 x); width across 36, metal

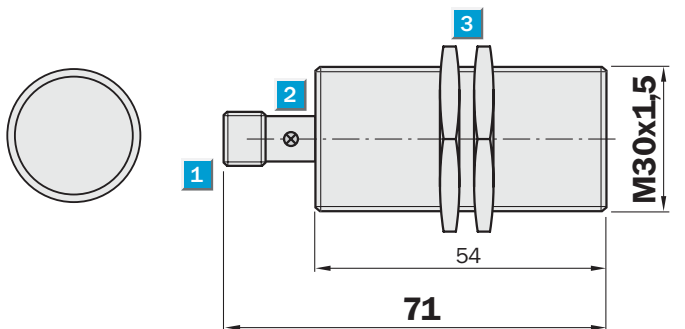

Connection type




IME30-15BNSZC0S	IME30-15BNOZC0S	IME30-15BNOZW2S
IME30-15BPSZC0S	IME30-15BPOZC0S	IME30-15BNSZW2S
		IME30-15BPOZW2S
		IME30-15BPSZW2S



M12, 4-pin

M12, 4-pin

3 x 0.5 mm²



Accessories

Connector, M12, 4-pin

Mounting systems