


- Enhanced sensing range
- Short-circuit protection (pulsed)
- Robust brass housing, nickel-plated with fine thread
M30 x 1.5 mm
- Enclosure rating IP 67
- Installation non-flush

Dimensional drawing






- 1 Connection
- 2 Display LED
- 3 Fastening nuts (2 x); width across 36, metal

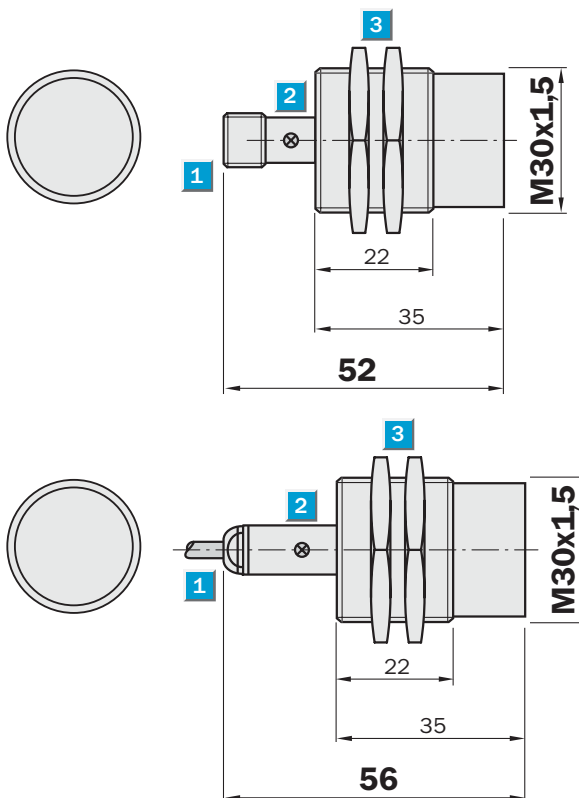




Connection type

IME30-20NNSZCOK	IME30-20NNOZCOK	IME30-20NNOZW2K
IME30-20NPSZCOK	IME30-20NPOZCOK	IME30-20NNSZW2K
		IME30-20NPOZW2K
		IME30-20NPSZW2K



M12, 4-pin

M12, 4-pin

3 x 0.5 mm²


Accessories

Connector, M12, 4-pin
Mounting systems