


- Enhanced sensing range
- Short-circuit protection (pulsed)
- Robust brass housing, nickel-plated with fine thread
M30 x 1.5 mm
- Enclosure rating IP 67
- Installation quasi-flush

Dimensional drawing






- 1 Connection
- 2 Display LED
- 3 Fastening nuts (2 x); width across 36, metal

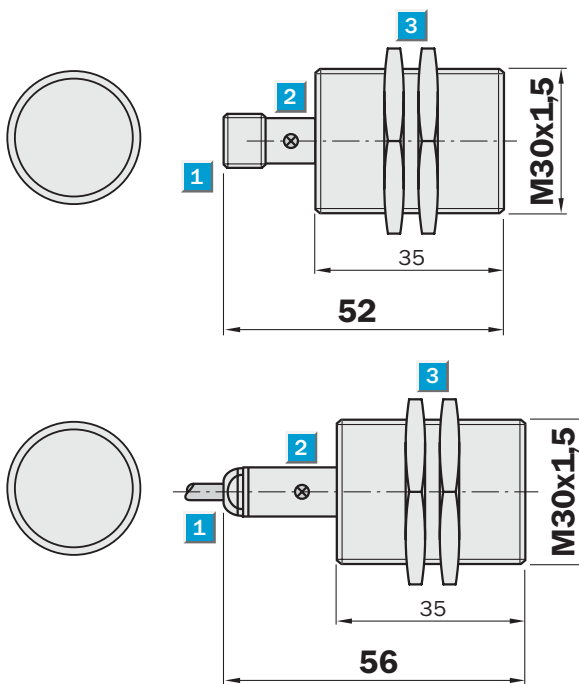

Connection type




IME30-15BNSZCOK	IME30-15BNOZCOK	IME30-15BNOZW2K
IME30-15BPSZCOK	IME30-15BPOZCOK	IME30-15BNSZW2K
		IME30-15BPOZW2K
		IME30-15BPSZW2K



M12, 4-pin

M12, 4-pin

3 x 0.15 mm²



Accessories

Connector, M12, 4-pin

Mounting systems